



SPECIFICATION FOR APPROVAL

www.twktec.com

KSA-35P-D5

USB-PD CHARGER

Customer Name KTEC

Customer Part NO.

Project Modify List

[illegible]

Manufacturer

SALES	QE	APPROVED BY	MADE BY
Tai	徐海鑫	贺洪明	冯朵朵

Approved Signatures

APPROVED BY

CHECKED BY

TESTED BY

--	--	--

USB-PD CHARGER

KSA-35P-D5

Manufacturer Part No.: KS240368



1.	INPUT REQUIREMENTS	4
1.1	Highlight & Features	4
1.2	General Description	4
1.3	Chemical Substance Control Laws	4
1.4	Input Conditions	4
1.5	Ac inrush current	4
2.	OUTPUT REQUIREMENTS	5
3.	MECHANICAL	6
3.1	Enclosure and Layout	6
3.2	Input and Output Configuration	6
4.	REGULATORY COMPLIANCE	7
4.1	EMC Specifications	7
4.1.1	Radiated and Conducted Emission	7
4.2	Immunity	7
4.2.1	Electrostatic Discharge Immunity	7
4.2.2	Radiated Field Immunity	7
4.2.3	Conducted Field Immunity	7
4.2.4	Fast Transient Immunity	7
4.2.5	Surge Immunity	8
4.3	Safety Requirements and Certification	8
4.3.1	Regulatory Standard	8
4.3.2	Additional Safety Requirements	8
5.	ENVIRONMENTAL REQUIREMENTS	8
6.	APPEARANCE DRAWING: (UNIT: MM)	9
7.	NAME PLATE	10
8.	PACKING (UNIT: MM)	11

USB-PD CHARGER

KSA-35P-D5

Manufacturer Part No.: KS240368



1. INPUT REQUIREMENTS

1.1 Highlight & Features

- Simple design philosophy.
- Reliability level of 50K hours MTBF @ 25°C (rated input voltage and using the Telcordia SR-332 Issue 3 method).
- DC output voltage must be Safe Extra Low Voltage (SELV) & Limited Power as defined by UL62368-1.
- Cooling: natural convection.
- Compliant with Class B USB Type-C Power Delivery Specification
- The USB-PD charger meet PD2.0, PD3.0, BC1.2.

1.2 General Description

This specification defines the performance characteristics for a class II adapter, single-phase 15.0-35.0 watts. Single output level power supply.

1.3 Chemical Substance Control Laws

PAHS 6P NP REACH NOP ROHS PROP65

1.4 Input Conditions

The supply shall operate over the voltage ranges as follows :

Rated input voltage	100-240Vac
Operating range	90-264Vac
Rated input frequency	50/60Hz +/- 3Hz
Rated input current	1.0A max. @ 100Vac to 240Vac
Power consumption	0.1W maximum@ 230Vac (no-loading)
Primary current protection	An adequate internal fuse on the AC input line is provided.
Input Configuration 2 Conductor	<u>2</u> Conductor

1.5 Ac inrush current

No damage shall be occurred and the input fuse shall not be blown up nominal input voltage full load 25°C cold start.

USB-PD CHARGER

KSA-35P-D5

Manufacturer Part No.: KS240368



2. OUTPUT REQUIREMENTS

2.1	Nominal DC output voltage	Fixed PDO					PPS
		5.0V	9.0V	12.0V	15.0V	20.0V	3.3-11.0V
2.2	Minimum load current	0.0A					
2.3	Rating load current	3.0A	3.0A	2.92A	2.33A	1.75A	3.0A max.
2.4	Rating output power	15.0W~35.0W					33.0W max.
2.5	Line regulation	The line regulation is less than ±5% while measuring at rated load. Test conditions: 50CM/20 # USB cable.					
2.6	Load regulation	The load regulation for +5.0V,+9.0V,+12.0V,+15.0V,+20.0V is less than <u>±5%</u> , at measured output load from 0% to 100% rated load. Test conditions: 50CM/20 # USB cable.					
2.7	Ripple and noise	Fixed PDO					PPS
		5.0V	9.0V	12.0V	15.0V	20.0V	3.3-11.0V
		150mVp-p	150mVp-p	200mVp-p	250mVp-p	300mVp-p	250mVp-p
		Add 0.1uF/50V ceramic capacitor and 10uF/50V aluminum electrolytic capacitor in parallel the output terminal. Measured with 20MHz Bandwidth Oscilloscope at full load land rated input voltage 115Vac & 230Vac.					
2.8	Average efficiency	Meet DOE VI					
		AC115V/60Hz and 230V/50Hz, output Load current from 100%,75%,50%,25%. The test point: end PCBA board, no include DC cable.					
2.9	Turn on delay time	5000ms maximum at nominal input AC voltage and full load.					
2.10	Rise time	The supply shall have a start-up rise time of less than 100ms to rise to within regulation limits for all DC outputs.					
2.11	Hold up time	When power off, DC output must be maintained <u>8ms</u> in regulation limit at 115V/230Vac and full load.					
2.12	Output over-shoot	Less than 10% of nominal voltage value.					
2.13	Protection function						
	Over-voltage protection	The output voltage shall be clamped by internal protection.					
	Short-circuit protection	The adapter shall not be damaged by short the DC output to Ground. The adapter shall resume normal operation when a short circuited fault condition is removed.					
	Over current protection	When overload is applied to the output, the power supply shall be shut down and enter auto-recovery or latch mode 4.5A max.					

USB-PD CHARGER

KSA-35P-D5 Manufacturer Part No.: KS240368



3. MECHANICAL

3.1 Enclosure and Layout

Plastic case	UL94V-0
Weight	/ g (Max.)
Dimensions	45x45x30mm
Color	WT-07

3.2 Input and Output Configuration

Input pin	International Pin
Output connector	DC plug Type: USB Type-C 5.0V/3.0A,9.0V/3.0A,12.0V/2.92A,15.0V/2.33A,20.0V/1.75A 3.3-11.0V/3.0A Max. 33.0W Max.

USB-PD CHARGER

KSA-35P-D5

Manufacturer Part No.: KS240368



4. REGULATORY COMPLIANCE

4.1 EMC Specifications

The external power supply must meet all specification in this section. it is required that the external power supply work closely with the customer's equipment in order to get the best EMC solution.

4.1.1 Radiated and Conducted Emission

FCC part 15: Class B for radiated and conducted emissions.

EN55032, Class B for radiated and conducted emissions.

4.2 Immunity

4.2.1 Electrostatic Discharge Immunity

EN 55035, EN 61000-4-2

Air Discharge: $\pm 15\text{kV}$

Contact Discharge: $\pm 8\text{kV}$

Performance Criteria B

Electrostatic-discharge test by contact or air should be conducted with Static-discharge tester (energy storage capacitance of 150pF and discharge resistance of 330 Ω) 15kV air discharge, 8kV contact discharge.

4.2.2 Radiated Field Immunity

EN 55035, EN 61000-4-3

Frequency Range: 80-1000MHz, still need test singly 1800MHz, 2600MHz, 3500MHz, 5000MHz

Field Strength: 3V/m with 80% amplitude modulation of 1kHz

Performance Criteria A

Radio-frequency electromagnetic field susceptibility test, RS 80-1000MHz, 3V/m, 80%AM(1KHz).

4.2.3 Conducted Field Immunity

EN 55035, EN 61000-4-6

Frequency Range: 0.15-80MHz(0,15 to 10 MHz , 3V ; 10 to 30 MHz , 3-1V ; 30 to 80 MHz , 1V)

Field Strength: 3A/m with 80% amplitude modulation of 1KHz

Performance Criteria A

4.2.4 Fast Transient Immunity

EN 55035, EN 61000-4-4

Power line: 1kV

Performance Criteria B

USB-PD CHARGER

KSA-35P-D5 Manufacturer Part No.: KS240368



4.2.5 Surge Immunity

EN 55035, EN 61000-4-5

Line to line: $\pm 1\text{kv}$

Line to earth: $\pm 2\text{kv}$

+ 90°/ -270°

Lighting surge voltage of differential and common modes shall be applies across AC input lines and across input and frame ground.

4.3 Safety Requirements and Certification

4.3.1 Regulatory Standard

The power supply shall comply with the following international regulatory standards:

for short	Country	Certified Status	Standard
UL	USA	Meet	UL62368-1
CUL	Canada	Meet	CSA C22.2 NO.62368-1

4.3.2 Additional Safety Requirements

- © Dielectric Withstand Voltage, Primary (input AC short)-to-Secondary (output DC short): 3000Vac, 10mA, 1minute.
- © Insulation Resistance, Input to output: 50MΩ (MIN.) at 500 VDC.
- © Reinforced insulation system, Primary-to-Ground and Primary-to-Secondary.
- © The leakage current shall not exceed 0.25mA.

5. ENVIRONMENTAL REQUIREMENTS

Temperature	Operating	-10°C +35°C
	Non-Operating	-20°C +70°C
Humidity	Operating	5%~90% (Non Condensing)
	Non-Operating	5%~90% (Non Condensing)
Altitude	Sea level to 2000m	


USB-PD CHARGER

KSA-35P-D5

Manufacturer Part No.: KS240368



6. APPEARANCE DRAWING: (UNIT: MM)

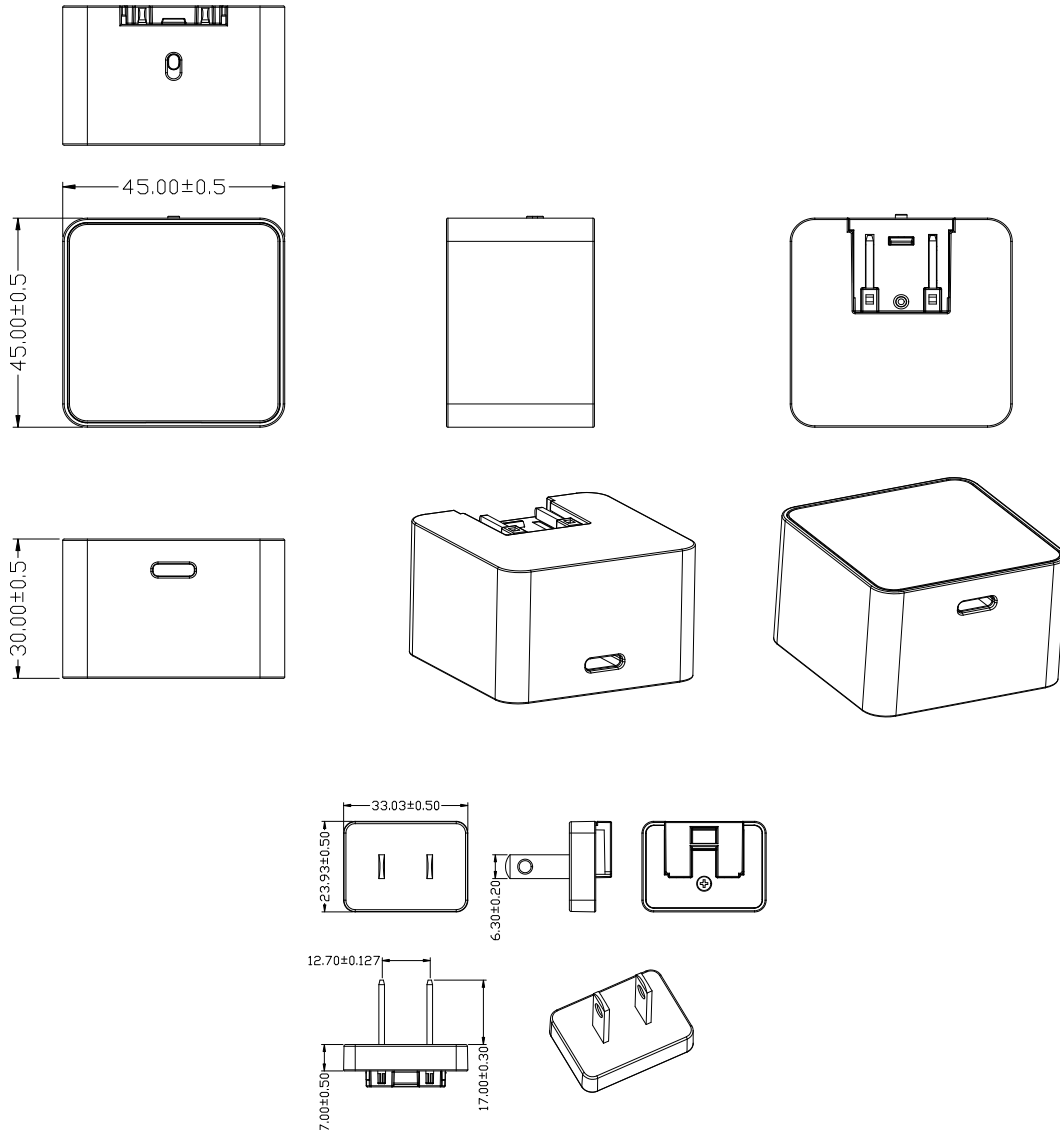

UL PLUG

NOTE:


1. Case cover & chassis material: PC WT-07 (NO KTEC)
2. AC PIN MATERIAL: BRASS (NI PLATED)
3. PAHS 6P NP REACH NOP ROHS PROP65
4. Satin Finish
5. Top mold: MSS017112 Bottom mold: MSS019005

USB-PD CHARGER

KSA-35P-D5 Manufacturer Part No.: KS240368



7. NAME PLATE

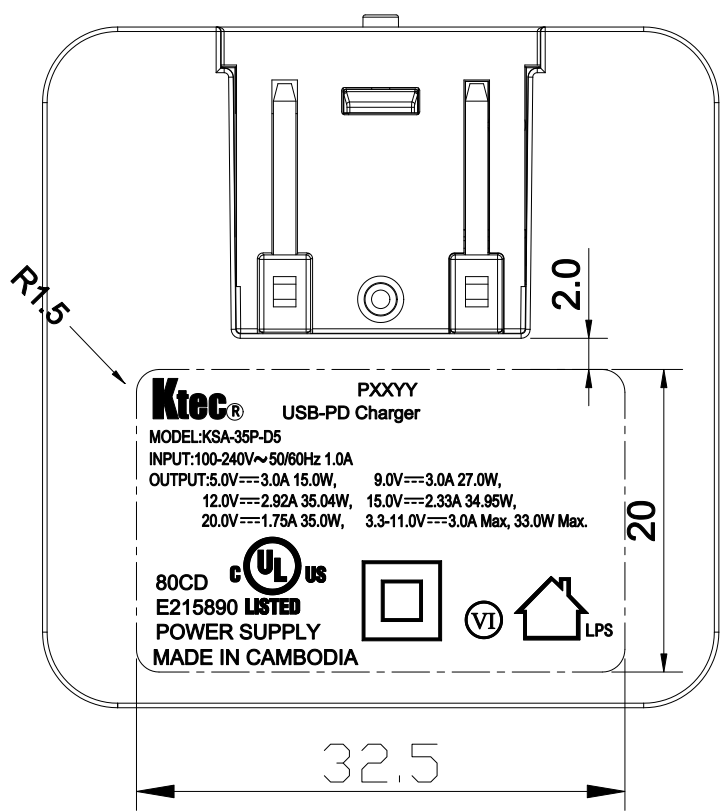

Note: Laser
PXXYY (P=PAHS XX=Week, YY=Year), use the actual production date.

USB-PD CHARGER

KSA-35P-D5 Manufacturer Part No.: KS240368



8. PACKING (UNIT: MM)

